




CODEVINTEC

Tecnologie per le Scienze della Terra e del Mare

45° 27' 39.384" N
9° 07' 30.145" E

MagArrow UAS Deployable Magnetometer

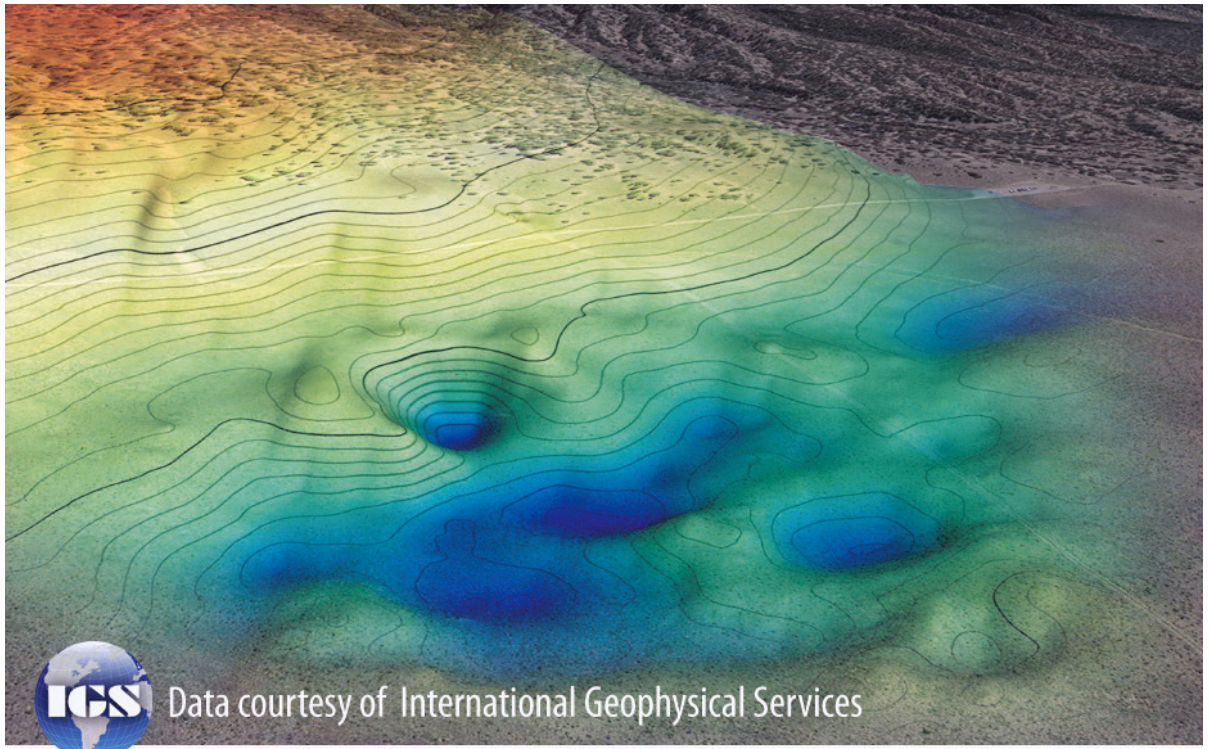

Survey large areas of inaccessible terrain 10x faster than a typical magnetic survey

“The UAS-enabled MagArrow also fills the gap between pilot-on-board aeromagnetic surveys and ground magnetic surveys where the areal size of the survey is too small to justify a pilot-on-board aeromagnetic survey, or the need for low altitude flight operations makes a pilot-on-board survey too risky or too costly.”

— Ron Bell of International Geophysical Services, MagArrow user



MagArrow

UAS Deployable Magnetometer

The MagArrow by Geometrics is our first ever UAS deployable magnetometer, and it sets a new standard for UAS magnetic surveys.

The MagArrow is engineered to address the limitations of both large manned and small helicopter surveys. To meet these special survey conditions, the Mag Arrow was built with reliability, efficiency, and ease of use in mind.

The vessel is made of an aerodynamic, light-weight carbon fiber shell. Internally the system contains an MFAM miniature magnetometer, GPS, IMU sensors, an SD card, and battery connectors.

The MFAM sensors in the MagArrow are our most groundbreaking sensors yet, capable of highly precise measurements in an extremely lightweight and tiny package. Our system ships complete with a full featured data logger.

The MagArrow can be attached easily to a wide variety of enterprise UAS. The 1000 Hz sample rate synchronized to the on-board GPS allows the system to function independently of the UAS and the UAS software. With such a fast sample rate, surveys can be completed at speeds up to 10 m/s with samples collected every 1 cm.

Operation in the field is simple. Survey details are programmed into the user's UAS software of choice. The MagArrow is turned on, and once airborne, pre-programmed GPS waypoints carry the MagArrow in altitude stable survey lines.

Once work is completed, data from the MagArrow can be wirelessly downloaded to a computer.

The MagArrow is a robust yet flexible system that can adapt to changing field conditions and new user workflows. How will you use the MagArrow?

Features & benefits

- > **Lightweight** – Weighs only 1 kg, allowing a flight time 20% longer* than a 2.5 kg-payload UAS
- > **UAV Agnostic** – Can be easily attached to your existing enterprise UAS
- > **Self-Contained** – GPS, storage, and WiFi on board. No connection to UAS needed
- > **Super-Fast Sampling Rate** – Fly faster, up to 10 m/s with samples every 1 cm. Filter out UAS motor noise
- > **Long Battery Life** – 2 hours of battery life will outlast multiple UAS flights. Hot swappable
- > **High Quality Data** – Peace of mind

*DJI Matrice 600 Pro





Specifications MagArrow

UAS Deployable Magnetometer

Powerfully built, simply executed

For simplicity in the field, the MagArrow has no external connections, instead containing the GPS, WiFi, and memory on board. Battery packs are hot swappable. All operations are accessed through the web-browser interface. Internal IMU sensors allow for a complete suite of data compensation algorithms to be applied, if desired, to remove platform-induced field variations.

Operating Principle	Laser pumped cesium vapor (Cs133 non-radioactive) total field scalar magnetometer
Operating Range	20,000 to 100,000 nT
Gradient Tolerance	10,000nT/m
Operating Zones	Configured for operation anywhere in the world without dead zones
Dead Zone	None
Noise/Sensitivity	0.005nT/ $\sqrt{\text{Hz}}_{\text{rms}}$ typical
Sample Rate	000 Hz. synchronized to GPS 1PPS
Bandwidth	400Hz
Heading Error	± 5 nT over entire 360° equatorial and polar spins typical
Output	WiFi data download over 2.4GHz WiFi access point
GPS	Commercial grade with typical 1 m accuracy
USB Port	Port for USB flash drive. Used for field upgrades
Data Logger	Built in Data Logger interface
Data Storage	32 Gbyte Micro SD card, U3 speed class. Not field-accessible. Contact sales for higher capacities.
Bandwidth	DC to 430 Hz
Data Download	Over WiFi 2.4GHz using user-supplied browser-capable device. 10 minutes of data requires 1 minute to download.
IMU	Bosch BMI160 Accel/Gyro - 200 Hz sample rate. Insentek Compass - 100 Hz Sample rate.
Total Weight	1 kg without batteries
Length	1 m

Battery

Battery Connection	2x XT60 connectors for 206 type batteries.
Battery Recommendations	Non-magnetic 1800 mAh or 2200 mAh lithium polymer, 3cell, 11.1v. Hot swappable

Environmental

Operating Temperature	10°C to +40°C (+14°F to +104°F)
Altitude	Performance guaranteed up to 3,000 m (10,000 ft.). Typically limited by UAS maximum altitude. Contact Sales for higher altitude operation
Humidity	Non-condensing

Accessories

Standard	Carrying case, AC power adapter and USB drive containing operation manual and software
Warranty	1 year

Specifications subject to change without notice

