



# CODEVINTEC

Tecnologie per le Scienze della Terra e del Mare

45° 27' 39.384" N  
9° 07' 30.145" E

## SeaBat® T51-R Revolutionary technology Outstanding performance



**Revolutionary combination  
of high resolution,  
high frequency and high  
efficiency.**

### Key Features

The SeaBat T50-P is fully frequency agile from 190 to 420 kHz, allowing for improved swath performance and reduced survey time under difficult conditions.

The SeaBat T50-P is designed for fast mobilization on smaller vessels. The Portable Sonar Processor and sonar head form a compact system, securing minimal interfacing and low space requirements.



## SeaBat® T51-R Revolutionary high-resolution Multibeam Echosounder with Autonomous AI sonar controls


The SeaBat T51-R is the latest addition to the leading SeaBat T-series product range, built on the shoulders of the renowned SeaBat T50 – but with four times the resolution.

The SeaBat T51-R brings on a revolutionary and industry-unique true 800kHz sonar which allows for surveys with the highest level of detail while still maintaining an amazing up to seven times water depth survey efficiency. The best of both worlds.

Besides the revolutionary 800kHz performance, the SeaBat T51-R also comes with a flexible 350-430kHz lower frequency range – intended for those surveys where extended range performance is required, giving you a truly flexible solution for all occasions.

SeaBat T51-tailored autonomous AI sonar controls, a SeaBat-unique innovation, provides reliable data and truly hands-free sonar operation – allowing for higher survey efficiency with reduced operator workload.

The SeaBat T51-R comes with an optional industry leading fully integrated Inertial Navigation System for accurate sensor time tagging and motion stabilization.

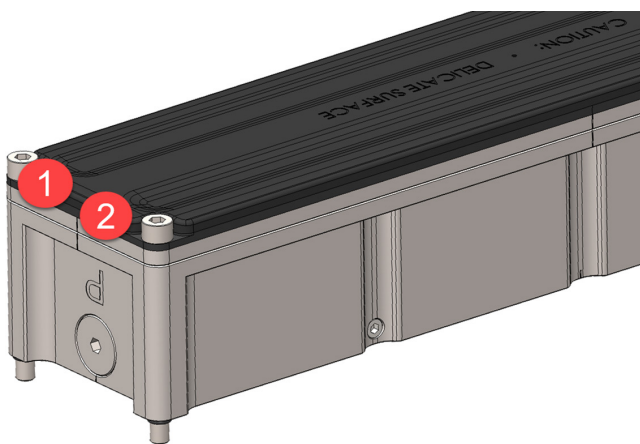

Nuovo trasduttore T51 con doppio Array

- 1) Array per basse frequenze
- 2) Array per alte frequenze

### SeaBat T51-R standard configuration

#### Rack-mounted Sonar Processor (RSP+)

- > Single point for all cable connections – for fast mobilization
- > Accurate sensor time tagging and motion stabilization from the optional integrated INS
- > 25m cable configuration
- > 2U form factor in standard 19" rack

#### SeaBat T51 sonar head assembly

- > Revolutionary high frequency band 700-800kHz
- > Flexible lower frequency 350-430kHz
- > Lightweight sonar bracket
- > Robust titanium housing
- > Less than 8kg in water

### Product benefits

- > Revolutionary and frequency flexible 700-800kHz sonar array for up to seven times water depth efficiency with extreme resolution to improve your decision making
- > 350-430kHz sonar operation for traditional and extended range survey requirements maximising your sonar usage
- > Autonomous AI Sonar Controls – allowing the operator to focus on other tasks than controlling the sonar
- > Unprecedented clean and ultra-high data quality for faster operational surveys and reduced processing time
- > Three-year standard warranty to give you peace of mind

**Seabat T51-R System Specifications**

<b>Input voltage</b>	100-230VAC 50/60Hz				
<b>Transducer cable length</b>	25m (standard) Optional: 10m				
<b>Temperature (operational / storage)</b>	Rack-mounted Sonar Processor: -5°C to +45°C / -30°C to +70°C Sonar wet-end: -2°C to +36°C / -30°C to +70°C				
	<b>height [mm]</b>	<b>width [mm]</b>	<b>depth [mm]</b>	<b>weight [kg/air]</b>	<b>weight [kg/water]</b>
<b>T51 Rx (EM7222)</b>	102.0	460.0	90.7	8.2	3.9
<b>T50 Tx (TC2186)</b>	86.6	93.1	280	5.4	3.4
<b>Rack-mounted Sonar Processor</b> <small>*Standard 19" rack-mount</small>	88 (2U)	478*	462	12.3-13.8	N/A
<b>Teledyne Type 20/30 IMU</b>	123	118	95.6	3.0	1.6
<b>T51 Acoustic performance</b>	<b>350kHz-430kHz</b>		<b>700-800kHz</b>		
<b>Across-track receiver beam width<sup>1</sup></b>	0.5°		0.25°		
<b>Along-track beam width<sup>1</sup></b>	1°		0.5°		
<b>Number of beams</b>	10 - 1024				
<b>Swath coverage (up to)</b>	10°-170°				
<b>Typical Depth (CW<sup>2</sup>)</b>	200 meters		>85 meters		
<b>Max Depth (CW<sup>3</sup>)</b>	300 meters		Est.>125 meters		
<b>Typical Depth (FM<sup>2</sup>)</b>	225 meters		>85 meters		
<b>Max Depth (FM<sup>3</sup>)</b>	350 meters		Est.>150 meters		
<b>Ping rate (range dependent)</b>	Up to 50 pings/s				
<b>Pulse length (CW)</b>	30 – 300µs				
<b>Pulse length (FM)</b>	300µs – 5ms				
<b>Depth resolution</b>	6 mm				
<b>Depth rating (sonar head)</b>	50 meters				
<b>Teledyne INS Type -20*</b>	Roll/Pitch	Heading <sup>4</sup>	Heave <sup>4</sup>	TrueHeave <sup>4</sup>	
	0.02°	0.015°	5cm/5%	2cm/2%	
<b>Teledyne INS Type -30*</b>	Roll/Pitch	Heading <sup>4</sup>	Heave <sup>4</sup>	TrueHeave <sup>4</sup>	
	0.01°	0.010°	5cm/5%	2cm/2%	

For relevant tolerances for dimensions above and detailed outlined drawings see Product Description

\* Optional

<sup>1</sup> Nominal values at 400kHz and 800kHz

<sup>2</sup> This is a depth range within which the system is normally operated, from the minimum depth to a depth value corresponding to the max. swath -50%. Deepest point in primary test area was 85 meters. Swath coverage was ~250m @700kHz and ~175 @800kHz

<sup>3</sup> This is the single value corresponding to the depth at which the swath is reduced to 10% of its max. value. For actual swath performance refer to Product Description. Estimated based on performance graphs

<sup>4</sup> With 4m GPS base line. Heave 5cm/5% whichever is greater for periods +/- 20sec



### **T51-P Scope of supply**

- > Receiver EM7222
- > Projector TC2186
- > Rack-mounted Sonar Processor
- > 25m receiver cable
- > 25m projector cable
- > Wet-end bracket
- > Nuts and bolt for ease of installation
- > Three-year warranty

### **Optional extras**

- > Integrated INS Type-20 or Type-30
- > 10m cable
- > Hydrodynamic fairing
- > Dual-head bracket
- > Teledyne RESON Sound Velocity Probe
- > Teledyne PDS Survey Package
- > Teledyne RESON Service Level Agreements
- > Motion and positioning sensors
- > X-Range - improves range and reduces external noise
- > Multi-Detect - multiple detections for enhanced detail over complex features and water column targets
- > FlexMode – increases data density where you need it most
- > Capable of dual head operation with up to 2048 beams

