


BATS

BROADBAND ACOUSTIC TRACKING SYSTEM

FEATURES

- Ultra Short Base Line Tracking System
- Broadband Spread Spectrum and Continuous Wave Acoustic Technology
- 17 to 30 kHz Frequency for Extended Range
- Compatible with Windows 98, NT, 2000, XP, and Vista

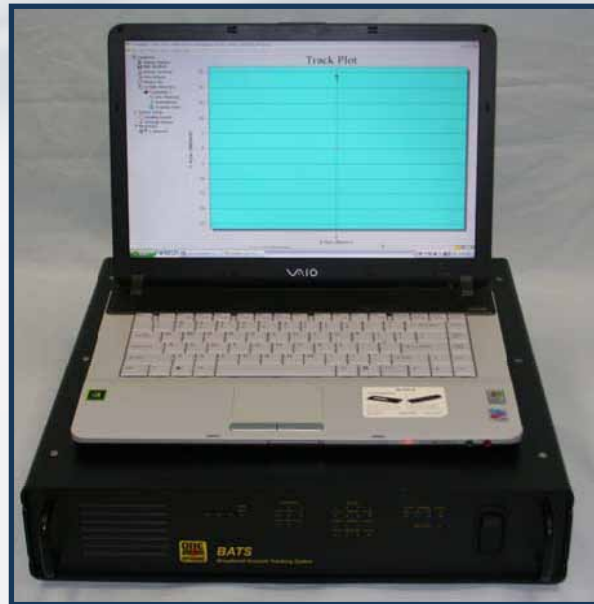

The new BATS System consists of a Signal Interface Module housed in a standard (3.5") rack mount chassis (19"). It can be configured for a desk top application with a PC or laptop running the EdgeTech (formerly ORE Offshore) Trackman Windows® software or coupled with a standard (3.5") rack mount PC and standard (3.5") rack mount Keyboard/Display. Alternately, BATS is available in a splash-proof portable unit.

The use of Broadband Acoustic Technology provides exceptional range and tracking performance. The software is user friendly and intuitive. The system interface is Ethernet TCP/IP to a PC running a compatible Windows® operating system.



CODEVINTEC
Tecnologie per le Scienze della Terra e del Mare

For more information please visit www.EdgeTech.com

info@EdgeTech.com | USA 1.508.291.0057

BATS

BROADBAND ACOUSTIC TRACKING SYSTEM

KEY SPECIFICATIONS

SYSTEM PERFORMANCE	
Transponder/Responder Absolute accuracy in horizontal position (over entire hemisphere) (does not include motion)	± 0.5% RMS of slant range
Repeatability accuracy (does not include motion)	± 0.3% RMS of slant range
Azimuth resolution	0.08 degree
Slant range accuracy	± 0.3 meters RMS (with correct sound speed)
Slant range resolution	0.05 meters
Acoustic coverage	± 90 degrees below hydrophone/projector
Signal to noise ratio	20 dB @ hydrophone (in 17-30 kHz band)
Receive frequency	17 to 30 kHz Spread Spectrum, Also, REMUS codes 1 - 4
Transmit frequency	16 to 21 kHz in 500Hz increments (400 Watt transmit output) (Plus, REMUS xmit codes 1 - 4)
Receive pulse width	Various coding schemes available
Transmit pulse width	1 to 15 milliseconds
OPERATIONAL CONTROLS VIA SUPPLIED SOFTWARE	
Up to 4 Target selection	Interrogation rate (0.6 to 20 seconds)
Tracking On/Off	Scaling (feet, meters, yards)
Target Type	Filtering Levels
Receive Threshold	Various coded waveforms
WEIGHTS AND DIMENSIONS	
Signal Interface Module (2U rack)	L 18.9 in (48.0 cm) x H 3.46 in (8.8 cm) x D 20 in (50.8 cm) 21 lbs (9.5 kg)
Hydrophone	L 20 in (50.8 cm) Dia 2.9 in (7.4 cm) 10 lbs (4.5 kg)
Cable	L 50 ft (15 meters) Dia* 0.5 in (1.3 cm) 8 lbs (3.6 kg)



CODEVINTEC

Tecnologie per le Scienze della Terra e del Mare

info@codevintec.it | www.codevintec.it

For more information please visit www.EdgeTech.com

info@EdgeTech.com | USA 1.508.291.0057